


# ProFlex

## Protective Packaging Wrap



### ProFlex - Polypropylene Protective Packaging Wrap for Lumber and Metal

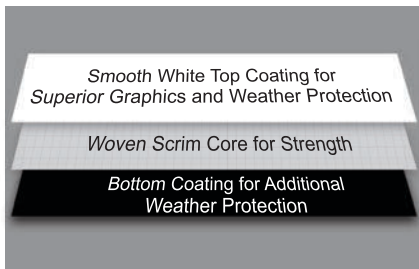

FT Synthetics **ProFlex** polypropylene protective packaging wraps are designed to protect your products in demanding environments during handling, shipping and storage. **ProFlex**, with its multilayer woven reinforced polypropylene construction, provides a durable protective packaging, resistant to sunlight and all weather conditions. **ProFlex** is available in two weights, 95gsm and 115gms, and widths up to 96 inches. Color choices are white/black or white/beige with custom printing of your logo in two colors.

- White top coat and black or beige bottom coating
- Balanced no-gap woven scrim layer for superior physical properties
- UV stabilizer in all three layers
- Water resistant polypropylene construction
- Low temperature flexibility to -40°C / -40° F
- Available in widths up to 96"
- Two color custom logo printing

PRODUCT PROPERTIES	STANDARD	ProFlex-95	ProFlex-115
DIMENSIONS		Custom Widths Up to 96 inches	
WEIGHT		95 g/m <sup>2</sup> (2.80 oz/yd <sup>2</sup> )	115 g/m <sup>2</sup> (3.40 oz/yd <sup>2</sup> )
COLOR		WHITE/BLACK or WHITE/BEIGE	
TENSILE STRENGTH	ASTM D5034	100 lb (45.4 kg) MD 96 lb (43.5 kg) CD	110 lb (50 kg) MD 105 lb (48 kg) CD
TEAR STRENGTH	ASTM D4533	30 lb (14 kg) MD 27 lb (12 kg) CD	35 lb (16 kg) MD 32 lb (14 kg) CD
PERMEABILITY	ASTM E96	<0.05 Perms	
PRINTING	TWO COLOR CUSTOM LOGO PRINTING AVAILABLE		

The data above are typical values based on ASTM standard tests. This data should not be considered as specifications.