

SILVER

FT SYNTHETICS

Over
35 Million
squares of
underlayment
sold




FT SILVER – High Quality Synthetic Roofing Underlayment


SILVER is a mechanically attached synthetic roofing underlayment designed for steep slope roofing to provide a lasting secondary layer of protection against wind driven rain, shingle blow offs, and damage caused by adverse weather conditions.

SILVER underlayment offers; superior durability, higher value for your dollar, and unmatched safety and reduced liability for your crew with the superior traction of our patented GRIPSPOT™ walking surface. GRIPSPOT™ technology, with its raised fibrous traction spots and smooth channels for shedding water, provides faster dry times and unmatched slip resistance in all types of weather and surface conditions; dry, wet, frozen, and dusty. **SILVER** underlayment is light weight, easy to carry, cool to the touch, and remains pliable in all weather conditions. It will not shrink in the heat, lays flat, and stays in place due to a high quality non-slip backside coating.

SILVER underlayment is designed for residential or commercial use under; wood, asphalt, and synthetic shingles, and residential metal primary roofing materials. It also meets and exceeds all required industry standards.

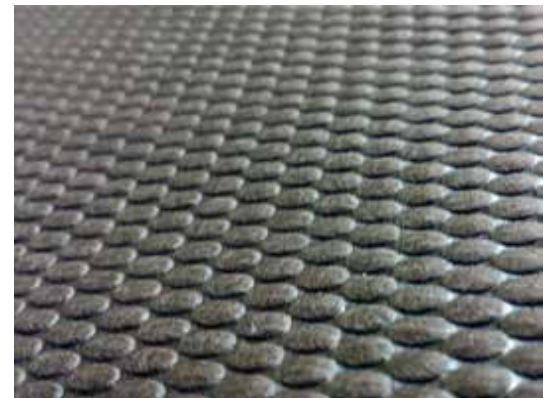

- GRIPSPOT™ patented slip resistant walking surface
- Water resistant - 12 mil thickness
- Up to 90 days UV exposure rating, 30 years limited warranty
- 12 times stronger than #30 felt
- 100% recyclable, inert to mold and mildew, water resistant polyolefin construction
- All temperature performance -40°F to 240°F
- Custom logo printing available



SILVER

FT SYNTHETICS

FT SYNTHETICS SILVER

| Specification & Standard | SILVER | #30 Felt |
|---------------------------------------|----------------------------------|-------------------|
| Length / width per roll | 48" x 250ft | 36" x 72ft |
| Weight / sq. ft. per roll | 22 lbs (10 kg) / 1000 sq. ft. | 45lbs/ 216 sq.ft. |
| Rolls per pallet (44" x 44") | 49 | 25 |
| Rolls per truckload - 36 pallets | 1764 | 1000 |
| Rolls required per 1,000 Sq feet | 1 | 5 |
| 100% recyclable | Yes | No |
| Material composition | Polyolefin | Asphalt |
| UV resistance | 90 days | None |
| Breaking strength ASTM D 5034 MD / CD | 107 lbs (49 kg) / 96 lbs (44 kg) | NA |
| Tear strength ASTM D4533 MD / CD | 25 lbs (11 kg) / 23 lbs (10 kg) | NA |
| Water shower exposure ASTM D 4869 | Pass | NA |
| Permeability ASTM E96 | <0.05 Perms | 1.75 Perms |
| Mullen Burst | 113 psi | NA |
| Nominal thickness ASTM D1777 | 12 mils | 60 mils |
| Temperature range | -40° F to 240° F | |
| Enhanced slip resistant surface | Excellent (GRIPSPOT) | Basic |
| Limited warranty | 30 years | None |

The data shown above is based on the test averages and independent test reports. There can be a +/-10% variation in the individual test results. This report should not be considered as a warranty for the manufacturer. The manufacturer is not responsible for the misrepresentation or misinterpretation of the data by the reader. Please find out more about the product by calling 1-844-353-9839 or visit www.ftsyn.com. The FT SILVER and GRIPSPOT™ logos are registered trademarks of FT Synthetics Inc.



Product meets or exceeds all required building codes: ASTM D226 Types I & II, ASTM D4869, CAN/CSA A123.3, CAN/CSA A220.1, Florida Building Code #FL20853, California Building Code Compliant, Class A Fire ASTM E108, CCRR 1028, AC188, Texas Department of Insurance. Miami-Dade NOA 16-1510.30, RCABC Roofstar