




ProFlex - Polypropylene Protective Packaging Wrap for Metal

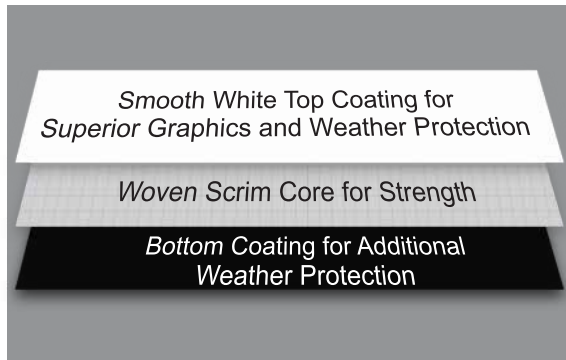

FT Synthetics ProFlex polypropylene protective packaging wraps are designed to protect your products in demanding environments during handling, shipping and storage. ProFlex, with its multilayer woven reinforced polypropylene construction, provides a durable protective packaging, resistant to sunlight and all weather conditions. ProFlex is available in two grades, Standard and Premium, in widths up to 48" or 96" inches. Color choices are white/black with custom printing of your logo in two colors.

PRODUCT PROPERTIES	METHOD	ProFlex Standard	ProFlex Premium
WIDTH		48",96"	
LENGTH		Custom Lengths up to 3000'	
COLOR		WHITE/BLACK	
TENSILE STRENGTH	ASTM D5034	90 lb (41 kg) MD 85 lb (39 kg) CD	100 lb (45 kg) MD 96 lb (44kg) CD
TEAR STRENGTH	ASTM D4533	27 lb (12 kg) MD 24 lb (11 kg) CD	30 lb (14 kg) MD 27 lb (12 kg) CD
PERMEABILITY	ASTM E96	<0.05 Perms	
PRINTING	TWO COLOR CUSTOM LOGO PRINTING AVAILABLE		

The data above are typical values based on ASTM standard tests. This data should not be considered as specifications.

- White top coat and black bottom coating
- Woven scrim layer balanced in both directions for superior physical properties
- UV and thermal stabilizers in all three layers
- High elongation to prevent ruptures in packaging
- Low shrinkage to prevent tearing around
- Mold and mildew resistant
- Low temperature flexibility to -40 °C / -40 °F
- Two color custom logo printing